


D&LOW VF系列整流桥 D&LOW VF series bridge rectifier

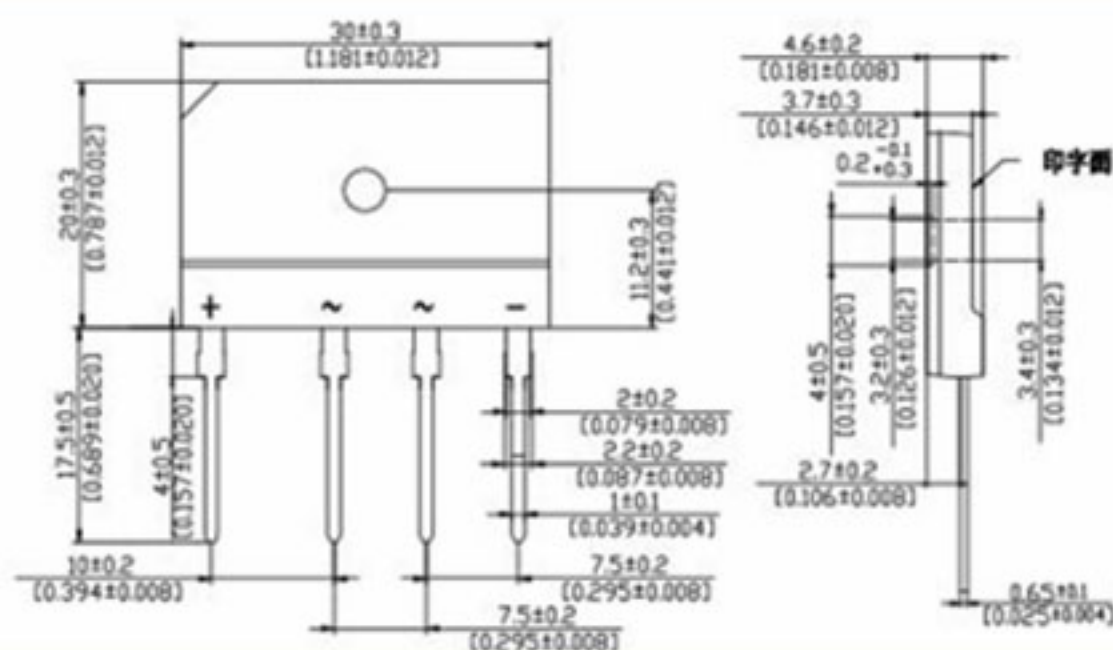

TYPE	Repetitive Peak Reverse Voltage	Maximum Average Rectified Current		Maximum Forward Peak Surge Current	Maximum Forward Voltage		Maximum Reverse Current		Junction Temperature	Insulating Voltage
	VRRM	IF(AV)@Tc		IFSM	VF @IF		IRRM @TA		TJM	Viso
	(V)	(A)	(°C)	(A)	(V)	(A)	25°C (µA)	125°C (µA)	(°C)	(V)
D10SB60	600	10	100	200	1.0	5	5	500	150	2500
D10SB80	800	10	100	200	1.0	5	5	500	150	2500
D10SB100	1000	10	100	200	1.0	5	5	500	150	2500
D15SB60	600	15	100	250	1.0	7.5	5	500	150	2500
D15SB60 LV	600	15	100	280	0.93	7.5	5	500	150	2500
D15SB60 LL	600	15	100	280	0.90	7.5	5	500	150	2500
D15SB80	800	15	100	250	1.0	7.5	5	500	150	2500
D15SB80 LV	800	15	100	280	0.93	7.5	5	500	150	2500
D15SB80 LL	800	15	100	280	0.90	7.5	5	500	150	2500
D15SB100	1000	15	100	250	1.0	7.5	5	500	150	2500
D20SB60	600	20	100	300	1.0	10	5	500	150	2500
D20SB60 LV	600	20	100	350	0.93	10	5	500	150	2500
D20SB60 LL	600	20	100	350	0.90	10	5	500	150	2500
D20SB80	800	20	100	300	1.0	10	5	500	150	2500
D20SB80 LV	800	20	100	350	0.93	10	5	500	150	2500
D20SB80 LL	800	20	100	350	0.90	10	5	500	150	2500
D20SB100	1000	20	100	300	1.0	10	5	500	150	2500
D25SB60	600	25	100	350	1.0	12.5	5	500	150	2500
D25SB60 LV	600	25	100	380	0.93	12.5	5	500	150	2500
D25SB60 LL	600	25	100	380	0.90	12.5	5	500	150	2500
D25SB80	800	25	100	350	1.0	12.5	5	500	150	2500
D25SB80 LV	800	25	100	380	0.93	12.5	5	500	150	2500
D25SB80 LL	800	25	100	380	0.90	12.5	5	500	150	2500
D25SB100	1000	25	100	350	1.0	12.5	5	500	150	2500
D30SB60	600	30	100	370	1.05	15	5	500	150	2500
D30SB80	800	30	100	370	1.05	15	5	500	150	2500
D30SB100	1000	30	100	370	1.05	15	5	500	150	2500
D35SB60	600	35	100	400	1.05	17.5	5	500	150	2500
D35SB80	800	35	100	400	1.05	17.5	5	500	150	2500
D35SB100	1000	35	100	400	1.05	17.5	5	500	150	2500
D50SB60	600	50	100	500	1.05	25	5	500	150	2500
D50SB80	800	50	100	500	1.05	25	5	500	150	2500
D50SB100	1000	50	100	500	1.05	25	5	500	150	2500